


AUTOMATIC HYDRAULIC BAND SAW WITH NUMERICAL CONTROL





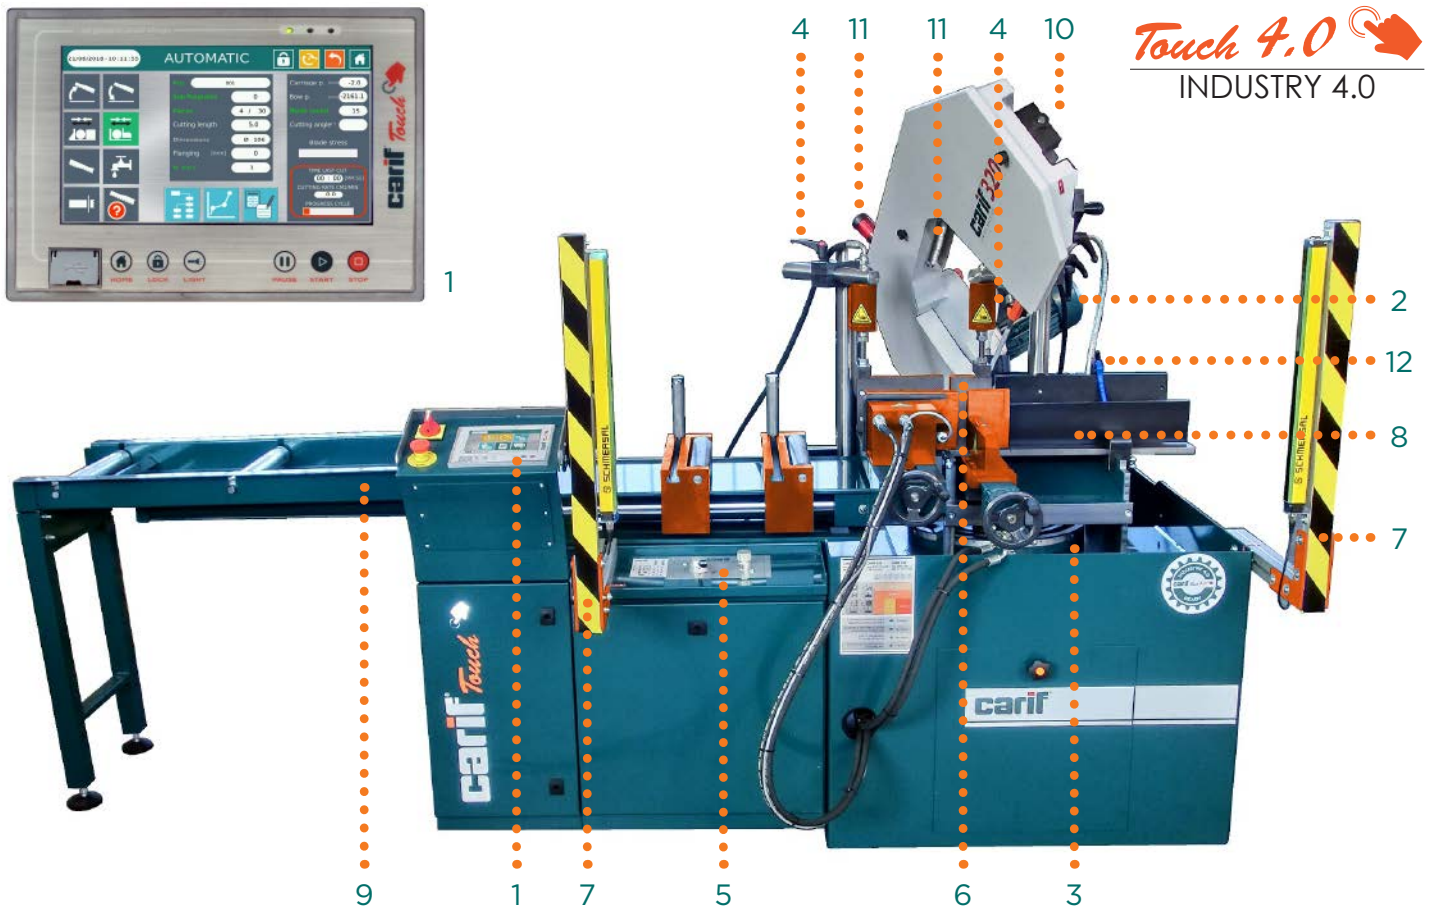

1. User interface Features:

- Touch screen LED with multifunctional software, modern and easy interface.
- USB interface and ETHERNET port for saving/importing data and remote control.
- Simple and fast programming with possibility of import/export cutting programs on USB or connected folder on company network.
- Application for: Job assistant, cutting statistics, documents library, calculator, converter, Remote control.
- Software 4.0 for remote monitoring program situation, machine statistics and machine deviations.

Standard Features:

1. Touch screen LED
 2. Speed moto-variator, electronic version Kw 2,2.
 3. Graduated plate for miter cutting 0/60° independent from the plans for pieces support.
 4. 2 Hydraulic devices for vertical clamping of bars.
 5. Hydraulic block for a fine regulation of bow feed and cutting pressure.
 6. Hardened and carburized jaws for strong fixture and moving of full bars.
 7. Safety guards front and back.
 8. Wide Plans for piece support for a comfortable and practical cutting area.
 9. Roller-unit L=1m for bar support.
 10. Sensor for monitoring blade rotation.
 11. Working LED light and emergency light.
 12. Flushing hose.
- 35Lt. Hydraulic oil for hydraulic power-pack.
 - Complete coolant equipment of 50 Lt. tank with electro-pump.
 - Bimetal blade M42 mm 3025x27x0,9, cardboard box + pallet, service wrenches, instruction manual and spare parts list.







CUTTING CAPACITY

												
90°		+45°	+60°	+90°		+45°	+60°	+90° *		+45°	+60°	90° opt.
275		200	130	265* / 250		185	130	320 x 220		185 x 220	120 x 140	320 x 230

* With thickness

L x H


TECHNICAL FEATURES

								
mm	KW	m/1'	mm	Kg	B	L	H	h
3025x27x0,9	2,2-0,75-0,09	15÷120	320	1050	1950	2770	1800 / 1320	830

H* Bow up / Bow down

Optional

1. Air/oil lubrication system 3lt. 2 elements
2. Digital angle display
3. Laser line for positioning
4. Slide for cut pieces



Roller units

Modular roller-unit type "A" : length 1m - width 400 mm - capacity 0,9 t/m

Modular roller-unit type "B" : length 1m - width 400 mm - capacity 0,9 t/m

Plan type "C" for connection roller-unit type "A" to the machine : width 400 mm

